
Pneumatic cylinder 040 X 080



SKU	C-M-040-0080
Producent	Pneumatig
piston diameter [mm]	40
stroke of actuator [mm]	80
connection	G 1/4"
action	double-sided
pressure range (two numbers separated by a dash in bar) [bar]	1 - 10
temperature range (two numbers with hyphen) [°C]	0 - 80
body	stainless steel
covers	anodized aluminium
piston rod	chromium-plated steel
seals	polyurethane
amortization	mechanical

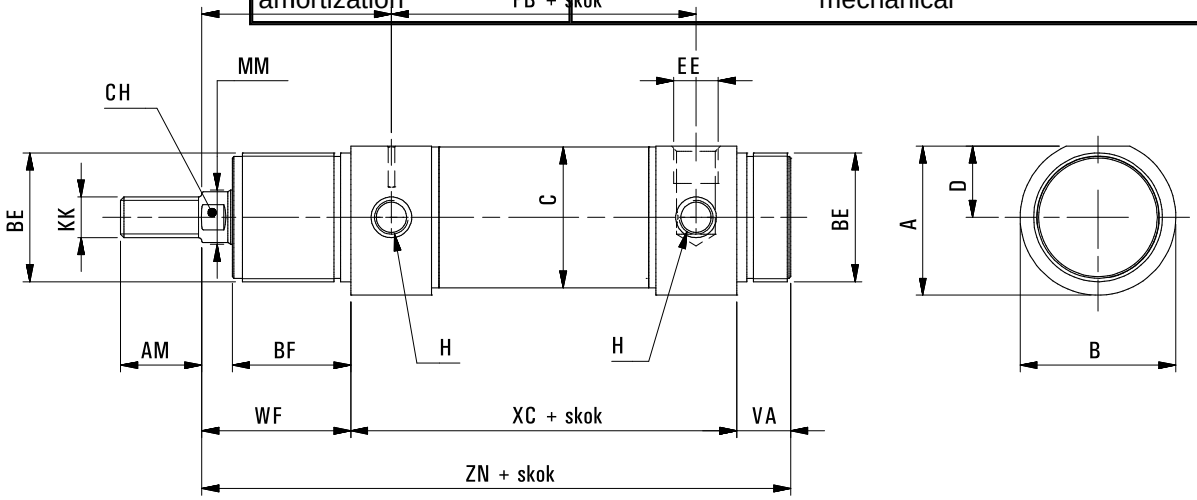

Ø	A	AM	ØB	BE	BF	C	CH	D	EE	H	KK	ØMM	PB	VA	WF	XC	Y	ZN
32	36,5	20	38	M30x1,5	30	33,6	10	17,5	G1/8	M8x1	M10x1,25	12	78	14	38	96	47	148
40	44	24	46	M38x1,5	35	41,6	13	21	G1/4	M10x1	M12x1,25	16	89	16	45	113	57	174
50	55	32	57	M45x1,5	38	52,4	17	26,5	G1/4	M12x1,5	M16x1,5	20	98	18	50	120	62	188
63	67,5	32	70	M45x1,5	38	65,4	17	32,5	G3/8	M14x1,5	m16x1,5	20	98	18	50	124	63	192