










SIV200

ISO-0 15407-1 / VDMA 24563
Solenoid / Pneumatic Valves


- 5/2, 5/3
- 18mm Body Width
- Sub-Base or Manifold Mounting Type
- Transition Flow 700ℓ/min (5bar)



** : Voltage Selection (see page 80)

SPECIFICATION

ITEM	SERIES	SOLENOID, PNEUMATIC	
		5 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Section Area(mm ²)-5bar		12.0	8.5
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		25ms or Less	35ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:3.5VA(60Hz) / DC:2.5W	

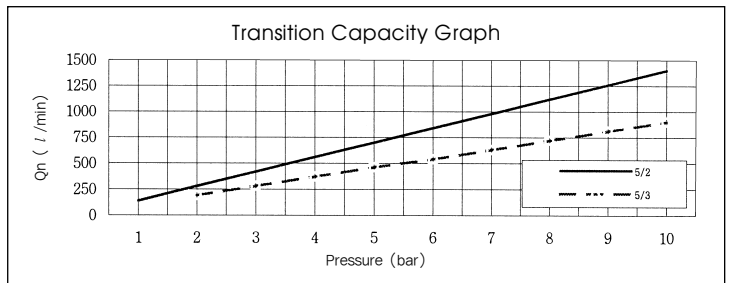


- ### The Material of Parts
- Valve Body : Die-Cast Aluminium
 - Spool : Aluminium
 - Seals : NBR
 - Spring : Stainless
 - Cap : Zinc Pressure Die-Cast
 - Pilot Parts : Glass Filled Nylon
 - Armature : Stainless Steel
 - Armature Seals : Viton

* The specification on each item can be amended without any prenotice to improve a performance.
* The specification on each item can be different from actual specification.

ORDERING NO.

SIV2 1 1 - I P - SC1 - CN1 - A2

Valve Series	Function	Return Method	Int/Ext. Pilot	Manual Operator	Solenoid Coil Type	Connector Type	Voltage
SIV2 : Solenoid Valve	1	5/2 Single	0 None	I Internal Pilot	0 None	0 None	0 None
	2	5/2 Double	1 Air + Spring	E External Pilot	P Push Non-Locking	CN1 Normal Connector	A2 AC 220V
	3	5/3 Closed Center	2 Air		L Lever Locking	SG1 Grommet/Flying Leads	A1 AC 110V
SIP2 : Pneumatic Valve	4	5/3 Open Center	3 Spring		SD1 Grommet/Flying Leads With LED	CZ1 Connector With LED & Surge Suppressor	A4 AC 24V
	5	5/3 Pressure Center			SL1 90 Degree Plug-in Wire Assembly With LED		D4 DC 24V
					SM1 180 Degree Plug-in Wire Assembly With LED		D2 DC 12V



Solenoid & Pilot Actuated Spool Valves

18mm Body Width




5Port 2Position Solenoid Valve

Single Solenoid
SIV211-IP-SG1-***





External Pilot

SIV211-EP-SG1-***



Double Solenoid


SIV220-IP-SC1-CN1-***



5Port 3Position Solenoid Valve


Closed Center

SIV233-IP-SC1-CN1-***





Exhaust Center

SIV243-IP-SC1-CN1-***



Pressure Center


SIV253-IP-SC1-CN1-***

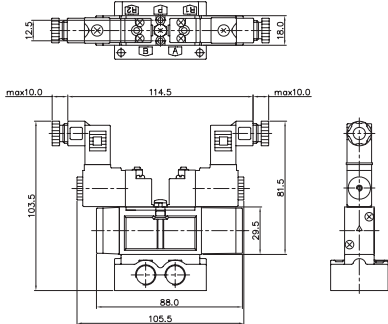

5Port 2Position Pneumatic Valve



Single Pneumatic

SIP211



Double Pneumatic


SIP220



5Port 3Position Pneumatic Valve


Closed Center

SIP233





Exhaust Center

SIP243



Pressure Center

SIP253




Sub Base Ordering Code


SIB2 1 - S		
Base Series	Port & Thread	Function
SIB2	0 None	S Single Station Sub Base, 1/4 Port Without Pilot Ports
SIV200 Solenoid Valve	1 G	SP Single Station Sub Base, 1/4 Port With Pilot Ports
	2 NPT	DB Single Station Sub Base, 1/8 Port Without Pilot Ports
		DC6 Double Modular Sub Base, Ø6 One-Touch Fitting
		E End Cover, 1/8 Port
		EB End Blanking Cover

SIB20 SINGLE, DOUBLE SUB BASE


(SIV200 Solenoid & Pneumatic Valve Use Sub Base)

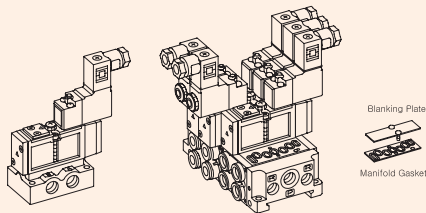

Single Station Sub Base Dimension

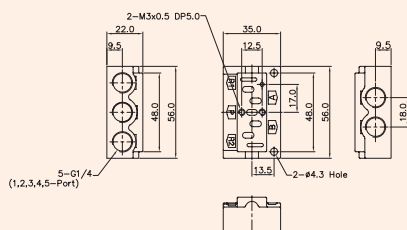

Double Modular Sub Base Dimension

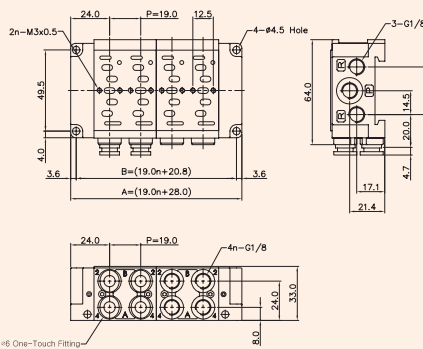

ITEM	2	4	6	8	10
B	58.8	96.8	134.8	172.8	210.8
A	66.0	104.0	142.0	180.0	218.0

Ordering Code SIB20-BLK		Blanking Plate (Material: STS304)
		Manifold Gasket. (Material: NBR)
Ordering Code SIB21-E		End Cover, 1/8 (Material: Al)
Ordering Code SIB20-EB		End Blanking Cover (Material: Al)
Ordering Code SIB21-DB		Double Modular Sub Base, 1/8 (Material: Al)
Ordering Code SIB20-DC6		Double Modular Sub Base Ø6 one-touch fitting (Material: Al)