


UNITOP 100 X 075 compact cylinder



SKU	C-U-100-0075
Producent	Pneumatig
piston diameter [mm]	100
stroke of actuator [mm]	75
connection	G 1/4"
action	double-sided
pressure range (two numbers separated by a dash in bar) [bar]	1 - 10
temperature range (two numbers with hyphen) [°C]	-10 - 70
body	anodized aluminium
covers	anodized aluminium
piston rod	stainless steel AISI 303
seals	polyurethane + NBR
amortization	mechanical

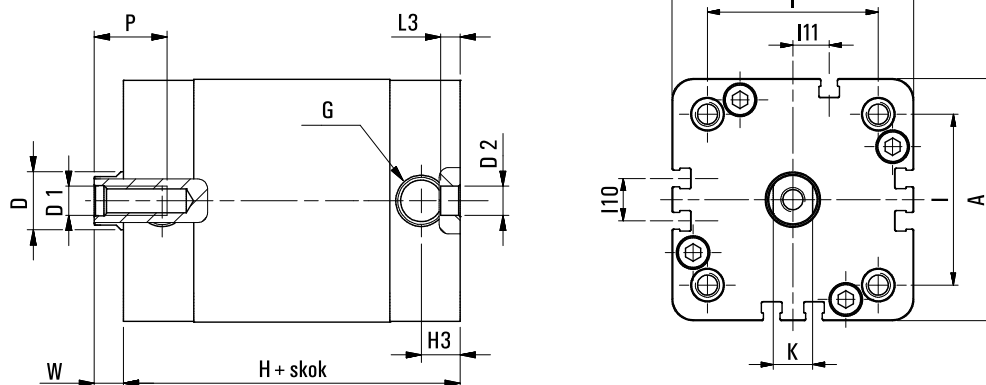

Ø	A	ØD	ØD1	ØD2	G	H	H3	I	I10	I11	K	L3	P	W
63	80	16	M8	8	G1/8	50	8	62	14	12	13	4	17	7,5
80	100	20	M10	8	G1/8	56	8,5	82	18	12	17	4	17	8
100	124	25	M12	8	G1/4	66,5	10,5	103	35	17,5	22	4	22	10