


## Silownik kompaktowy 40 x 250



|                                                               |                    |
|---------------------------------------------------------------|--------------------|
| SKU                                                           | C-D-040-0250       |
| Producent                                                     | Pneumatig          |
| piston diameter [mm]                                          | 40                 |
| stroke of actuator [mm]                                       | 250                |
| connection                                                    | G 1/8"             |
| pressure range (two numbers separated by a dash in bar) [bar] | 1 - 10             |
| temperature range (two numbers with hyphen) [°C]              | -10 - 70           |
| body                                                          | anodized aluminium |
| covers                                                        | aluminium casting  |
| seals                                                         | polyurethane + NBR |
| amortization                                                  | mechanical         |

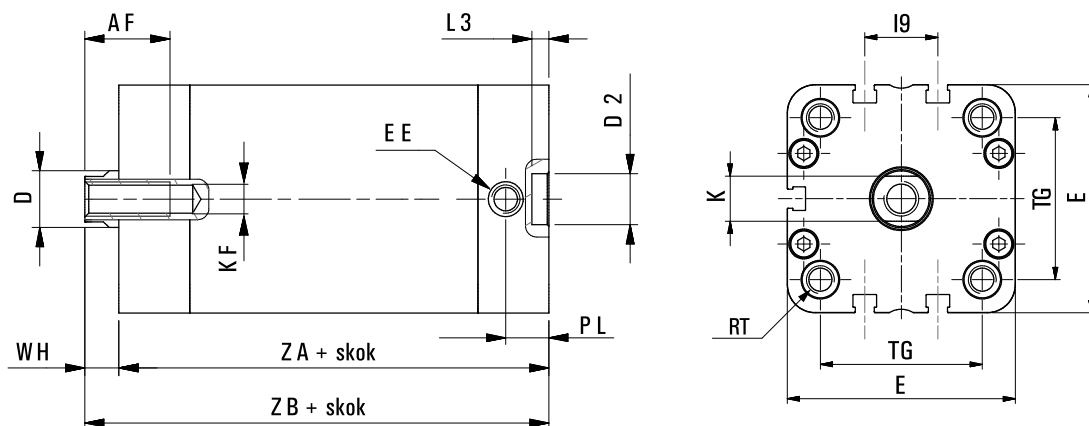

| Ø   | AF | ØD | ØD2 | RT | E    | EE   | I9   | K  | KF  | L3 | PL | TG   | WH | ZA | ZB |
|-----|----|----|-----|----|------|------|------|----|-----|----|----|------|----|----|----|
| Ø40 | 15 | 12 | 9   | M6 | 54,5 | G1/8 | 12,8 | 10 | M8  | 3  | 8  | 38   | 7  | 45 | 52 |
| Ø50 | 17 | 16 | 12  | M8 | 65,5 | G1/8 | 21   | 13 | M10 | 4  | 8  | 46,5 | 8  | 45 | 53 |