


## UNITOP 080 X 050 M compact cylinder



|                                                               |                          |
|---------------------------------------------------------------|--------------------------|
| SKU                                                           | C-U-080-0050M            |
| Producent                                                     | Pneumatig                |
| piston diameter [mm]                                          | 80                       |
| stroke of actuator [mm]                                       | 50                       |
| connection                                                    | G 1/8"                   |
| action                                                        | double-sided             |
| pressure range (two numbers separated by a dash in bar) [bar] | 1 - 10                   |
| temperature range (two numbers with hyphen) [°C]              | -10 - 70                 |
| body                                                          | anodized aluminium       |
| covers                                                        | anodized aluminium       |
| piston rod                                                    | stainless steel AISI 303 |
| seals                                                         | polyurethane + NBR       |
| amortization                                                  | mechanical               |

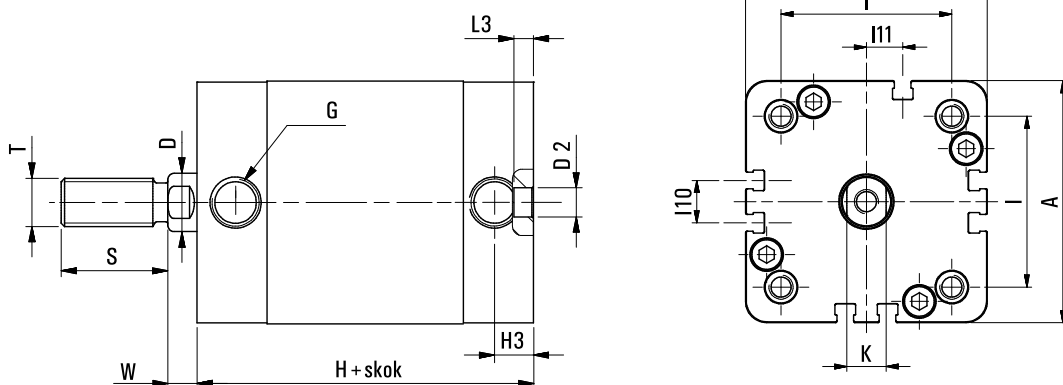

| Ø   | A   | ØD | ØD2 | G    | H    | H3   | I   | I10 | I11  | K  | L3 | S  | T        | W   |
|-----|-----|----|-----|------|------|------|-----|-----|------|----|----|----|----------|-----|
| 63  | 80  | 16 | 8   | G1/8 | 50   | 8    | 62  | 14  | 12   | 13 | 4  | 24 | M12x1,25 | 7,5 |
| 80  | 100 | 20 | 8   | G1/8 | 56   | 8,5  | 82  | 18  | 12   | 17 | 4  | 32 | M16x1,5  | 8   |
| 100 | 124 | 25 | 8   | G1/4 | 66,5 | 10,5 | 103 | 35  | 17,5 | 22 | 4  | 40 | M20x1,5  | 10  |