


Single acting compact cylinder 050 X 015 R



SKU	C-D-050-0015R
Producent	Pneumatig
piston diameter [mm]	50
stroke of actuator [mm]	15
connection	G 1/8"
action	spring-loaded ejection
pressure range (two numbers separated by a dash in bar) [bar]	2 - 10
temperature range (two numbers with hyphen) [°C]	0 - 80
body	anodized aluminium
covers	aluminium casting
piston rod	stainless steel AISI 303
seals	polyurethane + NBR
amortization	L3
spring	mechanical

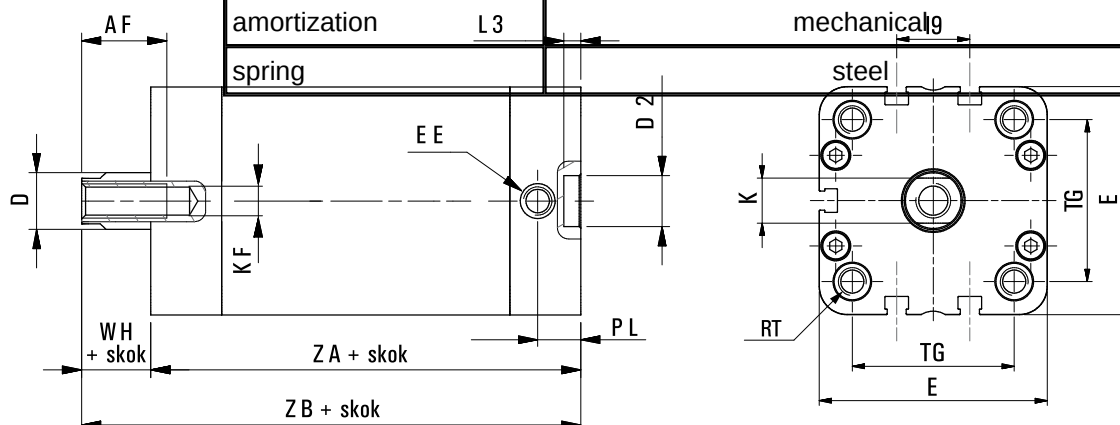

Ø	AF	ØD	ØD2	RT	E	EE	I9	K	KF	L3	PL	TG	WH	ZA	ZB
Ø40	15	12	9	M6	54,5	G1/8	12,8	10	M8	3	8	38	7	45	52
Ø50	17	16	12	M8	65,5	G1/8	21	13	M10	4	8	46,5	8	45	53