


## Siłownik pneumatyczny D-MM



|                                                               |                    |
|---------------------------------------------------------------|--------------------|
| SKU                                                           | C-D-063-0100MM     |
| Producent                                                     | Pneumatig          |
| piston diameter [mm]                                          | 63                 |
| stroke of actuator [mm]                                       | 100                |
| connection                                                    | G 1/8"             |
| pressure range (two numbers separated by a dash in bar) [bar] | 1 - 10             |
| temperature range (two numbers with hyphen) [°C]              | -10 - 70           |
| body                                                          | anodized aluminium |
| covers                                                        | aluminium casting  |
| seals                                                         | polyurethane + NBR |
| amortization                                                  | mechanical         |

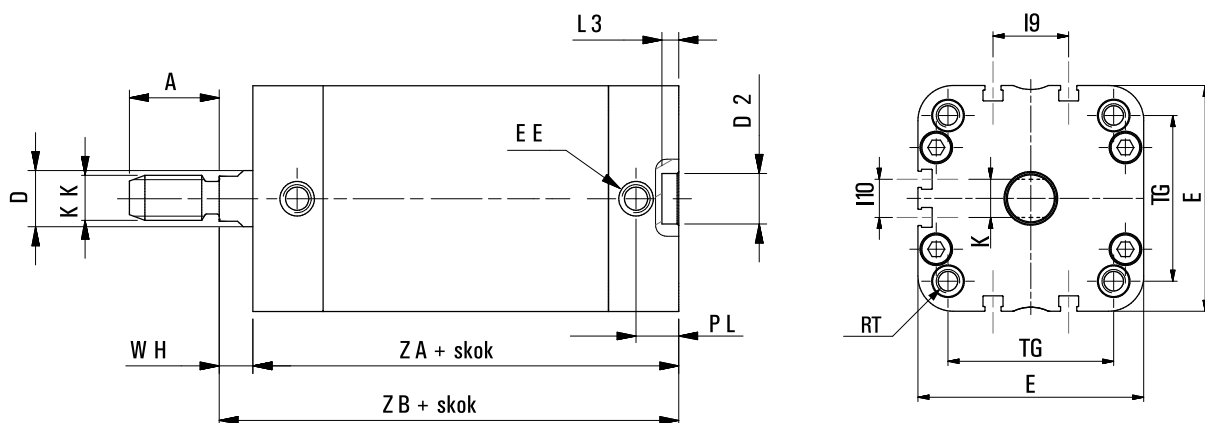

| Ø    | A  | ØD | ØD2 | RT  | E     | EE   | I9   | I10 | K  | KK           | L3 | PL   | TG   | WH | ZA | ZB |
|------|----|----|-----|-----|-------|------|------|-----|----|--------------|----|------|------|----|----|----|
| Ø63  | 22 | 16 | 12  | M8  | 77    | G1/8 | 25,8 | 13  | 13 | M12<br>X1,25 | 4  | 7,5  | 56,5 | 8  | 49 | 57 |
| Ø80  | 28 | 20 | 12  | M10 | 95,5  | G1/8 | 30   | 18  | 17 | M16<br>x1,5  | 4  | 8    | 72   | 9  | 54 | 63 |
| Ø100 | 28 | 25 | 12  | M10 | 113,5 | G1/8 | 50   | 35  | 22 | M16<br>x1,5  | 4  | 10,5 | 89   | 10 | 67 | 77 |