


Single-acting compact cylinder 100 X 015 MS



SKU	C-D-100-0015MS
Producent	Pneumatig
piston diameter [mm]	100
stroke of actuator [mm]	15
connection	G 1/8"
action	spring return
pressure range (two numbers separated by a dash in bar) [bar]	2 - 10
temperature range (two numbers with hyphen) [°C]	0 - 80
body	anodized aluminium
covers	aluminium casting
piston rod	stainless steel AISI 303
seals	polyurethane + NBR
amortization	L3 mechanical I9
spring	steel

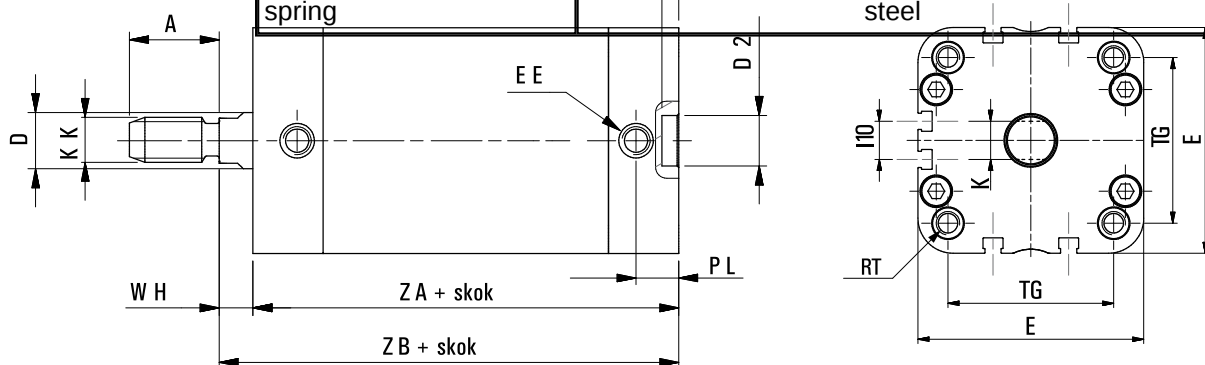

Ø	A	ØD	ØD2	RT	E	EE	I9	I10	K	KK	L3	PL	TG	WH	ZA	ZB
Ø63	22	16	12	M8	77	G1/8	25,8	13	13	M12 X1,25	4	7,5	56,5	8	49	57
Ø80	28	20	12	M10	95,5	G1/8	30	18	17	M16 x1,5	4	8	72	9	54	63
Ø100	28	25	12	M10	113,5	G1/8	50	35	22	M16 x1,5	4	10,5	89	10	67	77